



# SR-1

## PUMP START RELAY

### KEY FEATURES

- Electrical relays for both low voltage (24V AC control switching and high voltage (120V AC or 240V AC) main power contacts
- Highly efficient 0.1 Amp operating requirement
- Can also be used with irrigation control system for switching control of low voltage landscape lighting




### MODELS


Model	Description
SR-1	Pump Start Relay

### WIRING DIAGRAMS

SR-1 AS A PUMP START RELAY

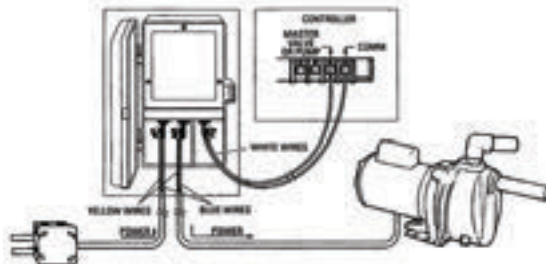

SR-1 AS A LANDSCAPE LIGHTING RELAY

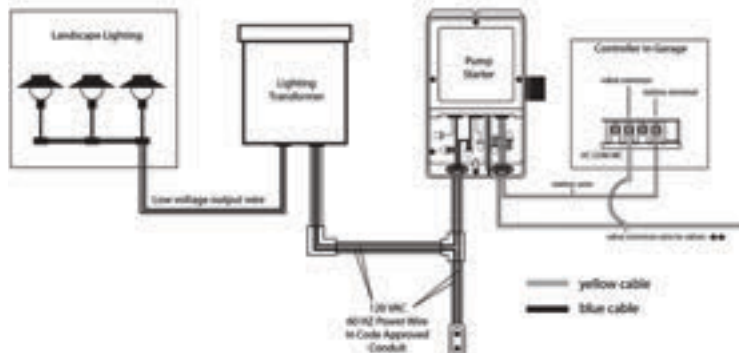

### ELECTRICAL RATINGS

- Contacts: Up to 1 HP at 120V AC, 1 Phase Up to 2 HP at 250V AC, 1 Phase (20A at 250V AC)
- Coil: 24V AC, 3VA (19V AC Min, 30V AC Max)
- Coil Draw: 0.1 Amp

\*Note: 2HP at 120V ac will exceed maximum amp rating



### DIMENSIONS

- H: 9 1/2", W: 6 1/4", D: 3 3/4"