

## HRS 200

Adjustable  
Pressure  
Regulator




### Features

- ⇒ Patented Adjustable Pressure Regulator can be adjusted from 30 to 40 psi with the turn of a screwdriver
- ⇒ Hydro-Seal check valve eliminates low head drainage and speeds initial pop-up
- ⇒ Five sealing surfaces defend against leaks on the stem, body, and cap
- ⇒ Over molded seal with a core of ridged plastic, stands up to heavy use and corrosives
- ⇒ Pressure activated seal, seals tight to the cap and stem
- ⇒ Improved stem design deflects debris, and particle pockets capture debris for longer life
- Threaded to fit all major manufacturers' female threaded nozzles
- Pre-installed "quick rip" flush cap makes nozzle installation quick and easy

### Specifications

- 4, 6, or 12 inch pop-up height
- 2 1/4 inch cap diameter
- 1/2 inch Female NPT
- 20 to 100 psi Recommended pressure range
- Spacing is dependent on nozzle

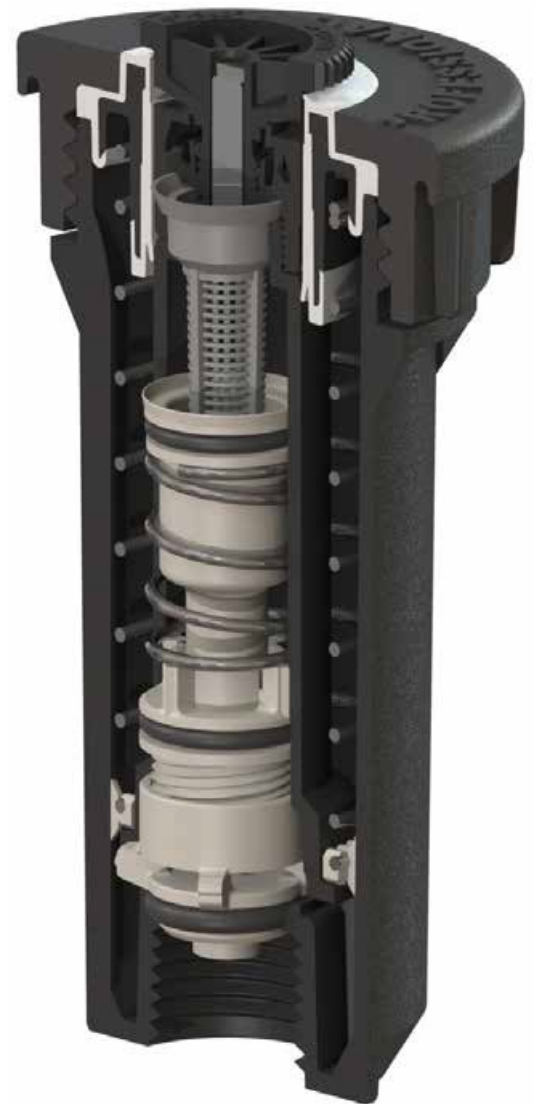

How to Specify	
Model	
HRS-200	Commercial Spray Head
Pop-up height	
04	4 inch
06	6 inch
12	12 inch
Options	
PR	Pressure Regulating

Models (SKU)	
HRS-200-04-PR (03019)	HRS 200 4" 30/40 PSI Pressure Regulated Spray Head With Check Valve
HRS-200-06-PR (03021)	HRS 200 6" 30/40 PSI Pressure Regulated Spray Head With Check Valve
HRS-200-12-PR (03022)	HRS 200 12" 30/40 PSI Pressure Regulated Spray Head With Check Valve

## HRS 200

Rugged and Durable



### Features

- ⇒ Five sealing surfaces defend against leaks on the stem, body, and cap
- ⇒ Over molded seal with a core of ridged plastic, stands up to heavy use and corrosives
- ⇒ Pressure activated seal, seals tight to the cap and stem
- ⇒ Improved stem design deflects debris, and particle pockets capture debris for longer life
- ⇒ Cap is fortified with more material and superior threads
- Threaded to fit all major manufacturers' female threaded nozzles
- Pre-installed "quick rip" flush cap makes nozzle installation quick and easy
- HRS-200-04-BL includes a factory installed Blu-Lock elbow for faster installation with Blu-lock swing pipe

### Specifications

- 4, 6, or 12 inch pop-up height
- 2 1/4 inch cap diameter
- 1/2 inch Female NPT
- 15 to 100 psi Recommended pressure range
- Spacing is dependent on nozzle



How to Specify	
Model	
HRS-200	Commercial Spray Head
Pop-up height	
04	4 inch
06	6 inch
12	12 inch
Options	
BL	Blu-lock Elbow

Models (SKU)	
HRS-200-04 (03016)	HRS 200 4" Spray Head
HRS-200-04-BL (03020)	HRS 200 4" Spray Body and 1/2" Blu-Lock Elbow
HRS-200-06 (03017)	HRS 200 6" Spray Head
HRS-200-12 (03018)	HRS 200 12" Spray Head with side inlet