

# PRLG

## PRESSURE REGULATOR LANDSCAPE GRADE

### Specifications

The pressure regulator shall be capable of operating at a constant, preset, non-adjustable outlet pressure of 10, 15, 20, 25, 30, 35 or 40 PSI (0.69, 1.03, 1.38, 1.72, 2.07, 2.41, or 2.76 bar) with a flow range between 0.5 - 7 GPM (114 - 1590 L/hr).

The pressure regulator shall maintain the predetermined operating pressure provided that the inlet pressure is at least 5 PSI (0.34 bar) above the expected outlet pressure, but not exceeding the maximum inlet pressure as shown on the Model Numbers chart for this regulator.

All pressure regulator models shall be equipped with one of these inlet-x-outlet configurations:

**Inlet**

- 3/4-inch Female National Pipe Thread (FNPT)
- 3/4-inch Female Hose Thread (FHT)

**Outlet**

- 3/4-inch Male National Pipe Thread (MNPT)
- 3/4-inch Male Hose Thread (MHT)

The upper housing, lower housing, and internal molded parts shall be of engineering-grade thermoplastics with internal elastomeric seals and a reinforced elastomeric diaphragm. Regulation shall be accomplished by a fixed stainless steel compression spring, which shall be enclosed in a chamber isolated from the normal water passage.

The regulator external housings shall be press-fit with locking wedges and assembled without screws or other metallic fasteners. Outlet pressure and flow shall be clearly marked on the outside of each regulator.

The pressure regulator shall carry a two-year manufacturer’s warranty on materials, workmanship, and performance. Each pressure regulator shall be water tested for accuracy before departing the manufacturing facility.


The pressure regulator shall be manufactured by Senninger Irrigation in Clermont, Florida. Senninger is a Hunter Industries Company.

### Physical

**3/4" FNPT x 3/4" MNPT model (shown top right)**

*Overall Length*  
3.6 inches (9.1 cm)


*Overall Width*  
1.6 inches (4.1 cm)

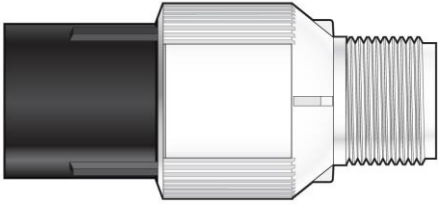

**3/4" FHT x 3/4" MHT model (shown bottom right)**

*Overall Length*  
3.1 inches (7.9 cm)

*Overall Width*  
1.6 inches (4.1 cm)

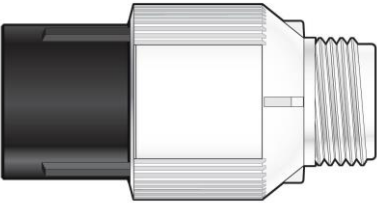



# PRLG

## PRESSURE REGULATOR LANDSCAPE GRADE

### Model Numbers

Model #	Flow Range	Preset Operating Pressure	Maximum Inlet Pressure
PRLG-10	0.5 - 7 GPM (114 - 1590 L/hr)	10 PSI (0.69 bar)	90 psi (6.20 bar)
PRLG-15	0.5 - 7 GPM (114 - 1590 L/hr)	15 PSI (1.03 bar)	95 psi (6.55 bar)
PRLG-20	0.5 - 7 GPM (114 - 1590 L/hr)	20 PSI (1.38 bar)	100 psi (6.89 bar)
PRLG-25	0.5 - 7 GPM (114 - 1590 L/hr)	25 PSI (1.72 bar)	105 psi (7.24 bar)
PRLG-30	0.5 - 7 GPM (114 - 1590 L/hr)	30 PSI (2.07 bar)	110 psi (7.58 bar)
PRLG-35	0.5 - 7 GPM (114 - 1590 L/hr)	35 PSI (2.41 bar)	115 psi (7.93 bar)
PRLG-40	0.5 - 7 GPM (114 - 1590 L/hr)	40 PSI (2.76 bar)	120 psi (8.27 bar)