


ZEBRA™ ADJUSTABLE EMITTERS

For more info visit our website www.tempoinc.com

Features:

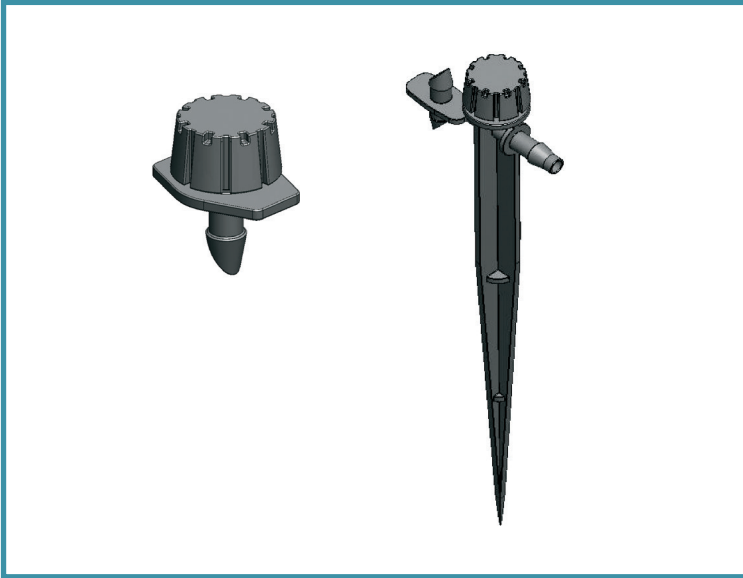

- Adjustable emitters with flow rates from 0 to 31.0 gph.
- Available in stream, vortex fan or umbrella bubbler spray patterns.
- Stream emitters are available in 5-stream 180° or 8-stream 360° spray patterns.
- Available with barbed or threaded inlets or on a 6" stake.
- Staked version includes additional 1/4" connector.
- Flow can be adjusted by rotating dial.
- Can be taken apart for easy cleaning.
- Can be shut off when not in use.
- UV stabilized to protect against sun degradation.
- 1/4" barbed inlet (fits 0.160" to 0.170" ID tubing).

Part No.	Description	Color Code	Inlet	Max Pressure
EZB360	360° 8-Stream Adjustable Emitter w/ Barbed Inlet	Black	1/4" barb	30 psi
EZT360	360° 8-Stream Adjustable Emitter w/ Threaded Inlet	Black	1/4" barb	30 psi
EZS360	360° 8-Stream Adjustable Emitter on 6" Stake	Black	1/4" barb	30 psi
EZB180	180° 5-Stream Adjustable Emitter w/ Barbed Inlet	Black	1/4" barb	30 psi
EZT180	180° 5-Stream Adjustable Emitter w/ Threaded Inlet	Black	1/4" barb	30 psi
EZS180	180° 5-Stream Adjustable Emitter on 6" Stake	Black	1/4" barb	30 psi
EZBFAN	Fan Spray Adjustable Emitter w/ Barbed Inlet	Black	1/4" barb	40 psi
EZTFAN	Fan Spray Adjustable Emitter w/ Threaded Inlet	Black	1/4" barb	40 psi
EZSFAN	Fan Spray Adjustable Emitter on 6" Stake	Black	1/4" barb	40 psi
EZBBUB	Adjustable Umbrella Bubbler w/ Barbed Inlet	Black	1/4" barb	30 psi
EZTBUB	Adjustable Umbrella Bubbler w/ Threaded Inlet	Black	1/4" barb	30 psi
EZSBUB	Adjustable Umbrella Bubbler on 6" Stake	Black	1/4" barb	30 psi

ZEBRA™ 360° ADJUSTABLE STREAM EMITTERS (EZB360, EZT360, EZS360)

No. of Clicks	15 psi		20 psi		30 psi	
	Discharge	Diameter	Discharge	Diameter	Discharge	Diameter
2	4.0 gph	0"	5.5 gph	6"	6.0 gph	8"
4	6.5 gph	7"	8.0 gph	10"	10.0 gph	16"
6	7.5 gph	10"	9.0 gph	13"	11.0 gph	18"
8	8.5 gph	12"	10.0 gph	16"	12.0 gph	20"
10	9.0 gph	14"	11.0 gph	18"	13.0 gph	22"
12	9.5 gph	15"	12.0 gph	20"	14.0 gph	24"
14	10.0 gph	16"	12.5 gph	22"	15.0 gph	26"



ZEBRA™ 180° ADJUSTABLE STREAM EMITTER (EZB180, EZT180, EZS180)

No. of Clicks	15 psi		20 psi		30 psi	
	Discharge	Radius	Discharge	Radius	Discharge	Radius
2	5.0 gph	8"	6.5 gph	11"	7.5 gph	14"
4	7.5 gph	15"	10.0 gph	19"	12.0 gph	24"
6	9.0 gph	20"	12.0 gph	25"	14.0 gph	31"
8	10.0 gph	24"	13.0 gph	29"	15.5 gph	35"
10	11.0 gph	27"	14.0 gph	32"	17.0 gph	38"
12	12.0 gph	28"	15.0 gph	34"	18.0 gph	40"
14	13.0 gph	29"	16.0 gph	35"	19.0 gph	42"



ZEBRA™ ADJUSTABLE FAN SPRAYERS (EZBFAN, EZTFAN, EZSFAN)

No. of Clicks	20 psi		30 psi		40 psi	
	Discharge	Diameter	Discharge	Diameter	Discharge	Diameter
2	5.0 gph	6"	6.0 gph	12"	7.5 gph	30"
4	7.0 gph	18"	9.0 gph	30"	10.5 gph	66"
6	9.0 gph	36"	11.5 gph	48"	13.5 gph	96"
8	10.5 gph	54"	13.5 gph	78"	16.0 gph	114"
10	12.0 gph	72"	15.0 gph	96"	18.0 gph	126"
12	13.0 gph	84"	16.5 gph	108"	19.5 gph	132"



ZEBRA™ ADJUSTABLE UMBRELLA BUBBLER (EZBBUB, EZTBUB, EZSBUB)

No. of Clicks	15 psi		20 psi		30 psi	
	Discharge	Diameter	Discharge	Diameter	Discharge	Diameter
2	4.0 gph	0"	5.0 gph	0"	7.0 gph	0"
4	7.0 gph	0"	9.0 gph	0"	11.0 gph	0"
6	10.0 gph	0"	13.0 gph	0"	15.0 gph	0"
8	13.0 gph	0"	17.0 gph	4"	19.0 gph	6"
10	16.0 gph	4"	20.0 gph	6"	23.0 gph	9"
12	19.0 gph	6"	23.0 gph	9"	27.0 gph	13"
14	22.0 gph	9"	27.0 gph	13"	31.0 gph	18"

