

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Hardscape

### Quick Connect Luminaire With Dual CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
7062 6"	27/30 2700K/3000K - 85	4.5W	110	BBR Bronze on Brass
7122 12"	27/30 2700K/3000K - 85	7.0W	230	BK Black on Aluminum
7182 18"	27/30 2700K/3000K - 85	8.5W	350	BZ Bronze on Aluminum GH Graphite on Aluminum SD Sand on Aluminum

Example: **7062-27/30BBR**

#### DESCRIPTION

Integral brightness control, select color temperature option. Hardscape easily detaches from capstone bracket after installation. Factory sealed water-tight fixture. Tightly spaced and diffused LEDs for even illumination. Mounting options included: stainless steel under capstone brackets, clips and hardware. Can be mounted on wall in all orientations

#### FEATURES


- Quick release connection at fixture to easily detach after installation
- Integral brightness control, select color temperature option
- Hardscape easily detaches from capstone bracket after installation
- Transformer required
- 10 yrs warranty

#### SPECIFICATIONS


<b>Construction:</b>	Solid die-cast brass, Corrosion resistant aluminum alloy
<b>Power:</b>	4.5W, 7.0W, 8.5W
<b>Input:</b>	50/60Hz, 9-15 VAC
<b>Dimming:</b>	Integral Brightness Control
<b>Light Source:</b>	Integrated LED 3 Step Mac Adam Ellipse
<b>Lens:</b>	PC Diffuser
<b>Rated Life:</b>	50000 Hours
<b>Mounting:</b>	Can be mounted on wall in all orientations
<b>Finish:</b>	Enamel Coated Bronze on Brass, Enamel Coated Bronze on Aluminum, Enamel Coated Graphite on Aluminum, Enamel Coated Sand on Aluminum, Enamel Coated Black on Aluminum
<b>Operating Temp:</b>	-40°F to 122°F (-40°C to 50°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, IP66



#### FINISHES



#### LINE DRAWING

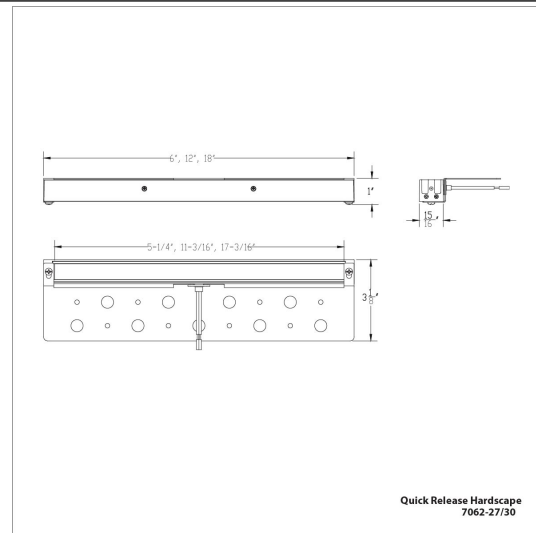

# WAC LIGHTING

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## 12V Magnetic Transformer (Outdoor)

### Accessory

#### Model & Product

Model & Product	L x W x H
9075-TRN-SS 75W Magnetic Landscape Lighting Power Supply in Stainless Steel	13.97IN x 5.35IN x 5.63IN
9150-TRN-SS 150W Magnetic Landscape Lighting Power Supply in Stainless Steel	18.9IN x 6.69IN x 6.3IN
9300-TRN-SS 300W Magnetic Landscape Lighting Power Supply in Stainless Steel	18.9IN x 6.69IN x 6.3IN
9600-TRN-SS 600W Magnetic Landscape Lighting Power Supply in Stainless Steel	14.49IN x 10.08IN x 5.94IN

#### DESCRIPTION

Example: 9075-TRN-SS

WAC Landscape Lighting Magnetic power supplies are 12V AC to support the entire line of 12V Landscape Lighting products, including Accent, Flood, Well, Indicator, Submersible, 12V Tape Light, Step and Wall, Deck and Patio, Path and Area, and Hardscape lighting products. The Stainless Steel housing enhances protection from corrosive and outdoor elements. Mounting extrusion with varying knockout sizes proved for a simple installation. Heavy gauged grounded and water resistant cord included for simple plug-in power feature. Hinged cover includes a loop to safely lock the power supply with an optional lock to secure access from inner contents. Multiple wire taps ranging from 12V-16V on terminal strip, for long runs where voltage drop may occur. Hinged cover includes a loop to safely lock the power supply with an optional lock to secure access from inner contents.

#### FEATURES

- Outdoor rated stainless steel transformer contains an outdoor rated 3-prong plug for power
- Knock outs for power and photosensor connections
- 3-prong outlet for timer
- Taps for 12V, 13V, 14V and 15V
- 6' lead input wire, except for the 600W which comes with a 5' lead wire
- UL 1838 Listed
- MLV Dimming capable, dimming dependent upon fixture type
- 5 year warranty

#### SPECIFICATIONS

Construction:	Stainless steel
Input:	120 VAC, 50/60Hz
Finish:	Stainless Steel Stainless Steel
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	UL, cUL, Wet Location Listed, IP65



#### FINISHES



Stainless Steel

#### LINE DRAWING

